



# ENERCO



HIGH QUALITY GAS PRODUCTS

# TABLE OF CONTENTS

## BY PRODUCT:

|                              |     |
|------------------------------|-----|
| Plan-O-Grams.....            | 4   |
| Propane Regulators.....      | 5-6 |
| Propane Hoses.....           | 7-8 |
| R.V. Kits.....               | 9   |
| Gas Quick-Connect Items..... | 10  |
| Propane Accessories.....     | 11  |

## GLOSSARY


|               |   |
|---------------|---|
| Backfire      | Also called Flashback. The flash back of the flame through the venturi, causing burning at the orifice.   |
| Burner        | Device forming an integral unit for the introduction of propane with air or oxygen into the combustion zone for ignition.   |
| Cylinder      | With respect to propane storage, refers to a container designed and fabricated in accordance with the specifications of the U.S. Department of Transportation for the storage of propane.   |
| L.H. Thread   | A threaded connection where the male thread is turned in a counter-clockwise direction into a female thread L.H..   |
| N.P.T.        | American Standard Pipe Threads.   |
| Orifice       | The opening in a cap or other device whereby the flow of propane gas is limited and through which the gas is discharged to the burner.  |
| P.O.L.        | A commonly employed thread L.H. connection used for propane cylinders and meeting the specifications of the American Standards Institute.   |
| Propane       | A hydrocarbon product HD <sub>5</sub> ; A special grade of liquefied petroleum gas composed of a minimum 90% liquid volume of propane C <sub>3</sub> H <sub>8</sub> and a maximum of 5% liquid volume of Propylene C <sub>3</sub> H <sub>6</sub> - Ref. ANSI Z21.57, ANSI 283.6, Z83.7. |
| QCC-1 Fitting | The QCC-1 connector is a nut-and-nipple assembly, and is easily identifiable by the Acme Nut large, external right-hand threads on the cylinder valve. The QCC-1 connector's patented nut is easy to connect and tighten without tools.   |
| R.H. Thread   | A threaded connection where the male thread is turned in a clockwise direction into a female thread R.H..   |
| Rate          | BTU input burned by an appliance during one hour of full operation.   |
| Regulator     | A device for controlling or maintaining a uniform gas pressure.   |
| Soft Nose     | With fittings, refers to a P.O.L. with a rubber "O" Ring which acts as a secondary seal for connection to a propane cylinder valve.   |
| Tank Union    | A P.O.L. assembly with a R.H. female device – i.e. the valve on an appliance.   |
| Thermocouple  | The pair of dissimilar metallic elements so joined as to produce a current when the junctions are at different temperatures. Used for sensing the flame in a safety shutoff assembly.   |



- All products feature full color insert and high quality clamshell packaging
- All Plan-O-Grams include peg hooks and four color banner






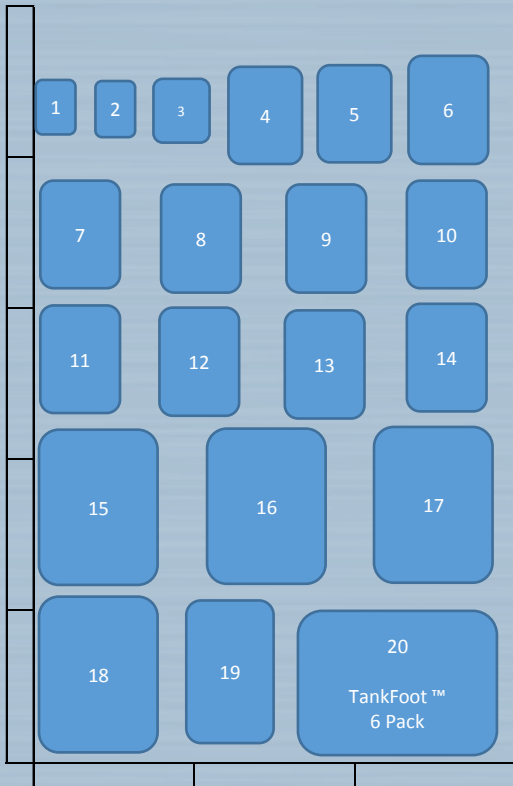

## #F173925- Enerco Plan-O-Gram (Top 20)

| # on POG | Enerco Part # | Description   | QTY |
|----------|---------------|---|-----|
| 1        | F176181       | Propane/Natural Gas Quick Connector Kit w/ Shut Off and Full Flow Plug                | 2   |
| 2        | F173729       | 1/4" Male Pipe Thread x 1/4" Inverted Female Flare                                    | 2   |
| 3        | F176497       | Propane Appliance ACME Nut-Green (200K BTU Rating)                                    | 2   |
| 4        | F173751       | Propane Adapter Tee   | 2   |
| 5        | F173753       | Propane 90° Stay Flow Adapter   | 2   |
| 6        | F171144-60    | 5' Propane Hose with Excess Flow Soft Nose POL  | 2   |
| 7        | F171158-15    | 15" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare                          | 2   |
| 8        | F171158-20    | 20" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare                          | 2   |
| 9        | F171138-20    | Pigtail with Green Acme Nut & 1/4" Inverted Male Pipe Thread                          | 2   |
| 10       | F171149-36    | 3' Propane Hose with Dual 3/8" Female Flares  | 2   |
| 11       | F171161       | 22" Propane Hose with 90 Regulator and ACME Nut and 3/8" Female Flare                 | 2   |
| 12       | F173766       | Auto Change Over Dual Stage Propane Regulator Horizontal Dual Stage Propane Regulator | 2   |
| 13       | F173763       | Vertical Dual Stage Propane Regulator   | 2   |
| 14       | F173868       | Horizontal Dual Stage Propane Regulator   | 2   |
| 15       | F171144-144   | 12' Propane Hose with Excess Flow Soft Nose POL and 1/4" Inverted Male Flare          | 2   |
| 16       | F173703-144   | 12' Propane Hose with ACME Nut and 1"-20 Male   | 2   |
| 17       | F173711       | 12' Propane Hose with Swivel 1"-20 Male   | 2   |
| 18       | F173735       | Stay Flow Plus Kit  | 2   |
| 19       | F173733       | Stay-A-While Kit  | 2   |
| 20       | F173169       | Tankfoot™ Tank Stabilizer (6 Pack)  | 6   |

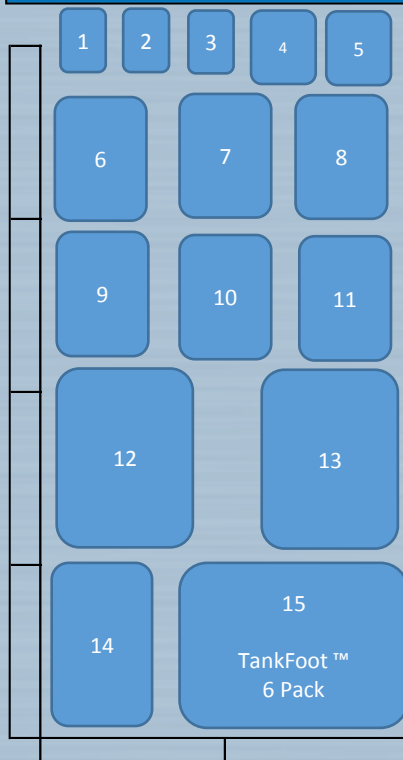

## #F173923- Enerco Plan-O-Gram (Small)

| # on POG | Enerco Part # | Description  | QTY |
|----------|---------------|--|-----|
| 1        | F176181       | Propane/Natural Gas Quick Connector Kit with Shut-Off and Full Flow Plug | 2   |
| 2        | F173655       | Excess Flow Soft Nose POL  | 2   |
| 3        | F173729       | 1/4" Male Pipe Thread x 1/4" Inverted Female Flare                       | 2   |
| 4        | F176497       | Propane Appliance ACME Nut - Green (200K BTU Rating)                     | 2   |
| 5        | F173830       | 30 PSI High Pressure Propane Regulator                                   | 2   |
| 6        | F173763       | Vertical Dual Stage Propane Regulator                                    | 2   |
| 7        | F173863       | Horizontal Dual Stage Propane Regulator with POL                         | 2   |
| 8        | F173766       | Auto Change Over Dual Stage Propane Regulator                            | 2   |
| 9        | F171138-20    | 20" Pigtail with Green ACME Nut and 1/4" Male Pipe Thread                | 2   |
| 10       | F171158-20    | 20" Pigtail with Green ACME Nut and 1/4" Inverted Male Flare             | 2   |
| 11       | F171144-60    | 5' Propane Hose with Excess Flow Soft Nose POL and 1/4" Inverted Flare   | 2   |
| 12       | F173703-144   | 12' Propane Hose with ACME Nut and 1"-20 Male Throwaway                  | 2   |
| 13       | F173735       | Stay Flow Plus Kit   | 2   |
| 14       | F173733       | Stay-A-While Kit   | 2   |
| 15       | F173169       | TankFoot™ Tank Stabilizer (6Pack)  | 2   |

## #F173927 (Medium)

## #F173928 (Large)


#F173927- Enerco Plan-O-Gram (Medium)

#F173928- Enerco Plan-O-Gram (Large)



| # on POG | Enerco Part # | Description   | QTY | QTY |
|----------|---------------|---|-----|-----|
| 1        | F176181       | Propane/Nature Gas Quick Connector Kit with Shut Off and Full Flow Plug   | 2   | 3   |
| 2        | F173655       | Excess Flow Soft Nose POL   | 2   | 3   |
| 3        | F173729       | 1/4" Male Pipe Thread x 1/4" Inverted Female Flare  | 2   | 3   |
| 4        | F176497       | Propane Appliance Acme Nut - Green (200k BTU Rating)  | 2   | 3   |
| 5        | F173830       | 30 PSI High Pressure Propane Regulator  | 2   | 3   |
| 6        | F173767       | Low Pressure Single Stage Propane Regulator   | 2   | 3   |
| 7        | F171158-12    | 12" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare  | 2   | 3   |
| 8        | F171158-15    | 15" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare  | 2   | 3   |
| 9        | F176342       | Propane Gas Gauge   | 2   | 3   |
| 10       | F173751       | Propane Adapter Tee   | 2   | 3   |
| 11       | F173753       | Propane 90° Stay Flow Adapter   | 2   | 3   |
| 12       | F171144-60    | 5' Propane Hose with Excess Flow Soft Nose POL and 1/4" Inverted Male Flare   | 2   | 3   |
| 13       | F171158-20    | 20" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare  | 2   | 3   |
| 14       | F171715       | Propane "Y" Adapter with POL and Two Male 1"-20 Throwaway Cylinder Threads  | 2   | 3   |
| 15       | F171158-24    | 24" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare  | 2   | 3   |
| 16       | F173710       | 5' Propane Hose with Swivel 1"-20 Male Throwaway Cylinder Thread and Swivel 1"-20 Female Throwaway Cylinder Thread  | 2   | 3   |
| 17       | F171158-30    | 30" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare  | 2   | 3   |
| 18       | F171158-36    | 36" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare  | 2   | 3   |
| 19       | F171158-48    | 48" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare  | 2   | 3   |
| 20       | F171158-60    | 60" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare  | 2   | 3   |
| 21       | F173868       | Horizontal Dual Stage Propane Regulator   | 2   | 3   |
| 22       | F173763       | Vertical Dual Stage Propane Regulator   | 2   | 3   |
| 23       | F173766       | Auto Change Over Dual Stage Propane Regulator   | 2   | 3   |
| 24       | F173703-60    | 5' Propane Hose with Acme Nut and 1"-20 Male Throwaway Cylinder Thread  | 2   | 3   |
| 25       | F171138-20    | 20" Pigtail with Green Acme Nut and 1/4" Male Pipe Thread   | 2   | 3   |
| 26       | F171149-36    | 3' Propane Hose with Dual 3/8" Female Flares  | 2   | 3   |
| 27       | F173717       | 5' Propane Hose with 1/4" Male Pipe Thread and 1/4" Female Pipe Thread  | 2   | 3   |
| 28       | F171161       | 22" Propane Hose with 90° Regulator and Acme Nut and 3/8" Female Flare  | 2   | 3   |
| 29       | F171144-144   | 12' Propane Hose with Excess Flow Soft Nose POL and 1/4" Inverted Male Flare  | 2   | 3   |
| 30       | F173703-144   | 12' Propane Hose with Acme Nut and 1"-20 Male Throwaway Cylinder Thread   | 2   | 3   |
| 31       | F173702       | 12' Propane Hose with Excess Flow Soft Nose POL and Swivel 1"-20 Male Throwaway Cylinder Thread                     | 2   | 3   |
| 32       | F173711       | 12' Propane Hose with Swivel 1"-20 Male Throwaway Cylinder Thread and Swivel 1"-20 Female Throwaway Cylinder Thread | 2   | 3   |
| 33       | F173733       | Stay A While Kit  | 2   | 3   |
| 34       | F173735       | Stay Flow Plus Kit  | 2   | 3   |
| 35       | F173169       | TankFoot™ Tank Stabilizer (6 Pack)  | 6   | 6   |

**\*\*The Medium and Large have the same part numbers and description the only difference is the quantity\*\***

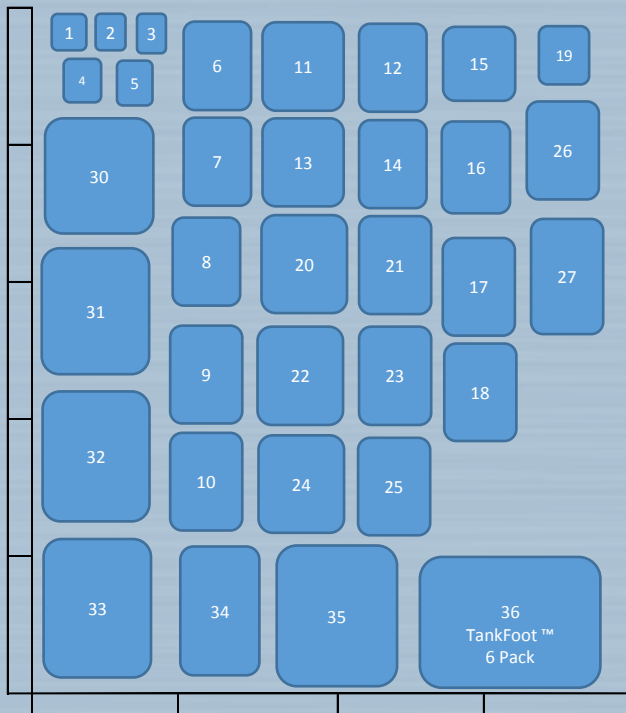

## #F173900- Enerco Plan-O-Gram (RV)

| # on POG | Enerco Part # | Description   | QTY |
|----------|---------------|---|-----|
| 1        | F176181       | Propane/Natural Gas Quick Connector Kit w/ Shut Off and Full Flow Plug                | 2   |
| 2        | F173655       | Excess Flow Soft Nose POL   | 2   |
| 3        | F173729       | 1/4" Male Pipe Thread x 1/4" Inverted Female Flare                                    | 2   |
| 4        | F173830       | 30 PSI High Pressure Propane Regulator  | 2   |
| 5        | F173767       | Low Pressure Single Stage Propane Regulator   | 2   |
| 6        | F171138-20    | Pigtail with Green Acme Nut & 1/4" Inverted Male Pipe Thread                          | 2   |
| 7        | F171161       | 22" Propane Hose with 90 Regulator and ACME Nut and 3/8" Female Flare                 | 2   |
| 8        | F171144-60    | 5' Propane Hose with Excess Flow Soft Nose POL and 1/4" Inverted Flare                | 2   |
| 9        | F171163-60    | 60" Propane Hose with 3/8" Female Flare and 3/8" Male Pipe Thread                     | 2   |
| 10       | F171149-72    | Auto Change Over High Capacity Dual Stage Propane Regulator (400K BTU Max)            | 2   |
| 11       | F173836       | 22" Propane Hose with 90 Regulator and ACME Nut and 3/8" Female Flare                 | 2   |
| 12       | F173766       | Auto Change Over Dual Stage Propane Regulator Horizontal Dual Stage Propane Regulator | 2   |
| 13       | F173763       | Vertical Dual Stage Propane Regulator   | 2   |
| 14       | F173868       | Horizontal Dual Stage Propane Regulator   | 2   |
| 15       | F176342       | Propane Gas Gaugere   | 2   |
| 16       | F173752       | Propane Stay A While Tee  | 2   |
| 17       | F173717       | 5' Propane Hose with 1/4" Male Pipe Thread and 1/4" Female Pipe Thread                | 2   |
| 18       | F173703-60    | 5' Propane Hose with Acme Nut and 1"-20 Male Throwaway Cylinder Thread                | 2   |
| 19       | F176497       | Propane Appliance Acme Nut - Green (200k BTU Rating)                                  | 2   |
| 20       | F171158-12    | 12" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare                          | 2   |
| 21       | F171158-15    | 15" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare                          | 2   |
| 22       | F171158-18    | 18" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare                          | 2   |
| 23       | F171158-20    | 20" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare                          | 2   |
| 24       | F171158-24    | 24" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare                          | 2   |
| 25       | F171158-36    | 36" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare                          | 2   |
| 26       | F171716       | Double Quick Connect  | 2   |
| 27       | F171718       | Tank Quick Connect  | 2   |
| 30       | F171144-144   | 12' Propane Hose with Excess Flow Soft Nose POL and 1/4" Inverted Male Flare          | 2   |
| 31       | F173703-144   | 12' Propane Hose with Acme Nut and 1"-20 Male Throwaway Cylinder Thread               | 2   |
| 32       | F171806       | 12' Quick Connect Propane Hose with Shut Off Valve and Male Full Flow QD              | 2   |
| 33       | F173734       | Stay A While Deluxe Kit   | 2   |
| 34       | F173733       | Stay A While Kit  | 2   |
| 35       | F171149-144   | 12' Propane Hose with Dual 3/8" Female Flares   | 2   |
| 36       | F173169       | TankFoot™ Tank Stabilizer (6 Pack)  | 6   |

### #F173929- Enerco Plan-O-Gram (4 x 4)



| # on POG | Enerco Part # | Description   | QTY |
|----------|---------------|---|-----|
| 1        | F176342       | Propane Gas Gauge   | 2   |
| 2        | F176181       | Propane/Nature Gas Quick Connector Kit with Shut Off and Full Flow Plug         | 2   |
| 3        | F176497       | Propane Appliance Acme Nut - Green (200k BTU Rating)                            | 2   |
| 4        | F173729       | 1/4" Male Pipe Thread x 1/4" Inverted Female Flare                              | 2   |
| 5        | F173767       | Low Pressure Single Stage Propane Regulator                                     | 2   |
| 6        | F173655       | Excess Flow Soft Nose POL   | 2   |
| 7        | F173830       | 30 PSI High Pressure Propane Regulator  | 2   |
| 8 & 9    | F173836       | Auto Change Over High Capacity Dual Stage Propane Regulator (400K BTU Max)      | 4   |
| 10       | F173766       | Auto Change Over Dual Stage Propane Regulator                                   | 2   |
| 11       | F173868       | Horizontal Dual Stage Propane Regulator   | 2   |
| 12       | F173752       | Propane Stay A While Tee  | 2   |
| 13       | F171158-15    | 15" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare                    | 2   |
| 14       | F171158-18    | 18" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare                    | 2   |
| 15       | F171158-20    | 20" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare                    | 2   |
| 16       | F171158-24    | 24" Pigtail with Green Acme Nut and 1/4" Inverted Male Flare                    | 2   |
| 17       | F171138-20    | 20" Pigtail with Green Acme Nut and 1/4" Male Pipe Thread                       | 2   |
| 18       | F173763       | Vertical Dual Stage Propane Regulator   | 2   |
| 19       | F173733       | Stay a While Kit  | 2   |
| 20       | F171149-36    | 3' Propane Hose with Dual 3/8" Female Flares                                    | 2   |
| 21       | F171149-72    | 6' Propane Hose with Dual 3/8" Female Flares                                    | 2   |
| 22       | F171163-30    | 30" Propane Hose with 3/8" Female Flare and 3/8" Male Pipe Thread               | 2   |
| 23       | F171163-60    | 60" Propane Hose with 3/8" Female Flare and 3/8" Male Pipe Thread               | 2   |
| 24       | F171144-60    | 5' Propane Hose with Excess Flow Soft Nose POL and 1/4" Inverted Male Flare     | 2   |
| 25       | F171161       | 22" Propane Hose with 90° Regulator and Acme Nut and 3/8" Female Flare          | 2   |
| 26       | F171806       | 12' Quick Connect Propane Hose Female with Shut Off Valve and Male Full Flow QD | 2   |
| 27       | F173734       | Stay A While Deluxe Kit   | 2   |
| 28       | F171144-144   | 12' Propane Hose with Excess Flow Soft Nose POL and 1/4" Inverted Male Flare    | 2   |
| 29       | F173169       | TankFoot™ Tank Stabilizer (6 Pack)  | 6   |



## #F173930 - Enerco Planogram

| # on POG | Enerco Part # | Description  | Qty. |
|----------|---------------|--|------|
| 1        | F176181       | Propane /Natural Gas Quick Connedor Kit w/ Shut Off and Full Flow Plug | 4    |
| 2        | F176281       | Propane or Natural Gas Full Flow Male Plug                             | 6    |
| 3        | F173729       | 1/4" MP x 1/4" Inverted Female Flare                                   | 6    |
| 4        | F176497       | Propane Appliance Acme Nut (200k BTU Rating)                           | 6    |
| 5        | F173758       | Propane Bulk Cylinder Adapter w/ Handwheel                             | 6    |
| 6        | F173767       | Single Stage Low Pressure  | 4    |
| 9        | F176342       | Propane Gas Gauge  | 4    |
| 10       | F173751       | Propane Adapter Tee  | 4    |
| 11       | F173753       | 90° Stay Flow Adapter  | 4    |
| 14       | F171715       | Propane "Y" adapter POL x (2) Male 1"20 connections                    | 6    |
| 12       | F171144-60    | 5' hose POL x 1/4" inverted male flare                                 | 4    |
| 16       | F173710       | 5' Propane Hose Assembly   | 4    |
| 7        | F171158-12    | 12" pigtail Green Acme x 1/4" inverted male flare                      | 4    |
| 8        | F171158-15    | 15" pigtail Green Acme x 1/4" inverted male flare                      | 4    |
| 13       | F171158-20    | 20" pigtail Green Acme x 1/4" inverted male flare                      | 4    |
| 15       | F171158-24    | 24" pigtail Green Acme x 1/4" inverted male flare                      | 4    |
| 17       | F171158-30    | 30" pigtail Green Acme x 1/4" inverted male flare                      | 4    |
| 18       | F171158-36    | 36" pigtail Green Acme x 1/4" inverted male flare                      | 4    |
| 19       | F171158-48    | 48" pigtail Green Acme x 1/4" inverted male flare                      | 4    |
| 20       | F171158-60    | 60" pigtail Green Acme x 1/4" inverted male flare                      | 4    |
| 24       | F173703-60    | 5' Hose Acme x 1"20 connections  | 4    |
| 25       | F171138-20    | 20" pigtail Green Acme x 1/4MP   | 4    |
| 27       | F171161       | 22" LP Hose w/ 90° Regulator   | 4    |
| 28       | F173717       | 5' Hose 1/4" MP x 1/4" FP  | 4    |
| 26       | F171149-36    | 3' Hose 3/8" FF x 3/8" FF  | 6    |
| 23       | F173766       | Auto Change Over   | 4    |
| 22       | F173763       | Vertical Dual Stage Regulator  | 4    |
| 21       | F173868       | Horizontal Dual Stage Regulator  | 4    |
| 29       | F171144-144   | 12' hose POL x 1/4" inverted male flare                                | 4    |
| 30       | F173703-144   | 12' Hose Acme x 1"20 connections                                       | 4    |
| 31       | F173702       | 12' Hose POL x 1"20 connections  | 4    |
| 32       | F173711       | 12' Propane Hose Assembly  | 4    |
| 33       | F173733       | Stay a While   | 4    |
| 34       | F173735       | Stay Flow Plus   | 4    |
| 35       | F173169       | TankFoot™ Tank Stabilizer -6 Pack                                      | 6    |







Model F17830

Propane 30 PSI High Pressure Regulator  
**(bulk available - 78381)**

Designed for high pressure RV applications. Ideal for fifth wheel split-cylinder applications. 360,000 BTU Capacity

1/4" female pipe thread inlet and outlet.



Model F176136

Propane Low Pressure Regulator

**(bulk available - 76136)**

Single stage regulator for use on small portable appliances and grills. 11" W.C. low pressure regulator 75,000 BTU max flow. Restricted Flow Soft Nose P.O.L x 3/8" Female Pipe Thread



Model F173763

Vertical Propane Two Stage Regulator  
**(bulk available - 73763)**


Vertical



Model F173868

Horizontal Propane Two Stage Regulator  
**(bulk available - 73827)**

Horizontal




Model F173863

Vertical Propane Two Stage Regulator w/POL  
**(bulk available - 73863)**

Horizontal



Dual stage regulator uses both a high/low pressure regulator to provide smooth and continuous flow to the appliance or RV while providing 11" W.C. Complete with covers (not shown). 160,000 BTU max flow. 1/4" Female Pipe Thread Inlet x 3/8" Female Pipe Thread Outlet.



Model F173719

High Pressure Regulator w/ POL

**(Bulk available - 73891)**

Adjustable (0-20 PSI) regulator. Most commonly used on torches, fish cookers, smokers or other high pressure appliances. Full Flow Soft Nose P.O.L. X 1/4" Female Pipe Thread



Model F173767

Propane Low Pressure Regulator

**(Bulk available - 73767)**

Single stage regulator for use on larger BTU appliances that require low pressure,

11" W.C. 90,000 BTU max flow. 3/8" Female Pipe Thread Outlet x 1/4" Female Pipe Thread Inlet



Model F173766

Propane Auto Changeover Two Stage Regulator  
**(Bulk available - 73766)**

Two stage auto changeover regulator provides easy change over from empty to full cylinder while providing adequate fuel to your RV. Complete with cover bracket and hardware (not shown).

11" W.C. 325,000+ BTU max flow. 2-1/4" Inverted Female Flare Inlets x 3/8" Female Pipe Outlet.



Model F173836

Propane Auto Changeover High Capacity Two Stage Regulator  
**(Bulk available - 73766)**

Two stage auto changeover regulator provides easy change over from empty to full cylinder while providing adequate fuel to your RV. Complete with cover bracket and hardware (not shown). 11" W.C. 400,00 BTU max flow. 2-1/4" Inverted Female Flare Inlets x 3/8" Female Pipe Outlet. Propane level indicator located on front of regulator.





Propane hose assembly with Acme Nut x 1/4" Inverted Male Flare Connects to propane tank and auto change-over dual stage regulator.

Model F171158-(XX)

Package Lengths (XX = Inches)  
12,15,18,20,24,30,36,48,60

Model 71158-(XX)

Bulk Lengths (XX = Inches)  
12,15,18,20,24,30,36,48,60

**NEW**



Excess Flow Soft Nose P.O.L. x 1/4" Inverted Male Flare Commonly used to connect an aux. tank to a motor home.

Model F171144-(XX)

Package Lengths (XX = Inches)  
12,15,18,20,24,30,36,48,60

Model 71144-(XX)

Bulk Lengths (XX = Inches)  
12,15,18,20,24,30,36,48,60



Propane hose assembly with Acme Nut x 1/4" Male Pipe Thread. Commonly used to connect a bulk cylinder on a camper to a regulator.

Model F171158-(XX)

Package Lengths (XX = Inches)  
12,15,18,20,24,30,36,48,60

Model 71158-(XX)

Bulk Lengths (XX = Inches)  
12,15,18,20,24,30,36,48,60



3/8" Male Pipe Thread x 3/8" Female Flar. Most commonly used to hook a low pressure regulator to an appliance.

Model F171163-(XX)

Package Lengths (XX = Inches)  
30,60

Model 71144-(XX)

Bulk Lengths (XX = Inches)  
24,30,36,48,60,72,96,144,180



Propane Hose assembly with 3/8" Female Flare x 3/8" Female Flare - Connects existing gas line to appliances equipped with 3/8" male flare

Model F171149-(XX)

Package Lengths (XX = Inches)  
36,72

Model 71149-(XX)

Bulk Lengths (XX = Inches)  
12,18,24,36,48,60,72





Model 71169(XX)

Bulk Lengths (XX = Inches)  
12,18,30,36,48,60,72



Propane hose assembly with 3/8" female flare fitting at both ends (3/8" ID Hose)



Model 71473-(XX)

Bulk Lengths (XX = Inches)  
40,72



Propane hose assembly with 1/2" female flare x 3/8" male pipe thread (3/8" ID)



Model F173717

5' Propane Appliance Extension Hose Assembly



(1/4" Male Pipe Thread x 1/4" Female Pipe Thread) (1/4" ID High Pressure Hose) - Use as an extension hose for portable propane appliances.



Model F171161

Packaged Length-22"

Model F171161-XX

Packaged Lengths (XX=Inches)  
60,144



(Regulator w/Appliance End Fitting/Acme Nut x 3/8" Female Flare) - For Type 1 (QCC-1) gas grill systems



Model F173703-60

Packaged Length - 60"

Model F173703-144

Packaged Length - 144"



(Swivel 1"-20 Male Throwaway Cylinder Thread x Swivel 1"-20 Female Throwaway Cylinder Thread). Used with most distribution posts or "T" and "Y" connectors as well as 1lb. disposable cylinders.



Model F173703-XX

Packaged Lengths (XX=Inches)  
60,144



(Appliance End fitting/Acme Nut x 1" - 20 Male Throwaway Cylinder Thread) Used to connect portable appliances to a 20 lb. tank.



Model F173701

Packaged Lengths  
60

Model F173702

Packaged Lengths  
144

Model 73701

Packaged Lengths  
60

Model 73702

Packaged Lengths  
144



Swivel 1" - 20 Male Throwaway Cylinder Thread x Excess Flow Soft Nose P.O.L w/Handwheel Connects appliances that are designed for disposable cylinders to a 5-20lb. cylinder.





Model F173714

Stay Flow



12' Propane Hose/Tee Assembly - Commonly used in RV applications to provide additional source of propane to high pressure appliances. Swivel 1"-20 Male throwaway cylinder thread x swivel 1"-20 female throwaway cylinder thread x tee assembly; excess flow Soft Nose P.O.L. x 1"-20 male throwaway cylinder thread x female P.O.L. and Acme thread



Model F173735

Stay Flow Plus



12' Propane Hose Assembly: Swivel 1"-20 Male Throwaway Cylinder Thread x Swivel 1"-20 Female Throwaway Cylinder Thread; 90° Stay Flow Adapter: Excess Flow Soft Nose P.O.L. x 1"-20 Male Throwaway Cylinder Thread x Female P.O.L. w/Acme Thread - Connects camper and additional appliance to a 20lb. propane tank.



Model F173733

Stay A While



5' Propane Flexible pigtail hose assembly: Soft Nose excess flow P.O.L. x 1/4" inverted male flare; stay a while tee: excess flow Soft Nose P.O.L. x 1" - 20 male throwaway cylinder thread x female P.O.L. w/ Acme thread x 1/4" inverted female flare. Connects auxiliary propane hose cylinder to motor home.



Model F173734

Stay A While Deluxe



12' Propane Hose Assembly: Swivel 1"-20 Male Throwaway Cylinder Thread x Swivel 1" - 10 Female throwaway cylinder thread; 5' hose assembly: excess flow Soft Nose P.O.L. x 1/4" inverted male flare; stay a while tee: excess flow Soft Nose P.O.L. x 1" - 20 male throwaway cylinder thread x female P.O.L. w/Acme thread x 1/4" inverted female flare





Model F173655

Propane Soft Nose P.O.L x 1/4" Male Pipe Thread

**(bulk available -73655)**

Excess flow P.O.L. tank connection approved for use with horizontal dual stage regulators



Model F173762

Propane Soft nose P.O.L w/handwheel x 1/4" Male pipe thread

**(bulk available -73762)**

Full flow P.O.L tank connection




Model F176495

Propane Acme Nut (Black)

**(bulk available -76495)**

Appliance End Fitting/Acme Nut x 1/4" Male Pipe Thread. For appliances with 80,000 BTU's or less.



Model F176497

Propane Acme Nut (Green)

**(bulk available -76497)**

Appliance End Fitting/Acme Nut x 1/4" Male Pipe Thread. For appliances with 200,000 BTU capacity



Model F176342

Propane Gas Gauge

**(bulk available -76350)**

Appliance End Fitting/Acme Nut x Acme Thread and Female P.O.L. Meets all Type 1 safety standards with a gauge. Detects dangerous leaks in propane system.



Model F173758

Propane Bulk Cylinder Adapter with Handwheel

**(bulk available -73758)**


1"-20 Throwaway Cylinder Thread x Restricted Flow Soft Nose P.O.L. To be attached directly to a bulk tank i.e., Mr. Camper, Coleman Co. Inc.<sup>®</sup>, or Century Primus<sup>®</sup> stove.




Model F173718

Propane 8' Universal Hose & Gauge Assembly

ACME Nut x 1"-20 Male Throwaway Cylinder Thread. Indicator glows in the dark. Connects propane appliances that are designed to be connected to 1 lb. propane bottles to 5-20 lbs tank.



Model F176130  
Propane 1"-20 Male Throwaway Cylinder  
Thread x 9/16" Left Hand Male Thread w/  
Shut-off



Model F173755  
Propane 1"-20 Male Throwaway Cylinder  
Thread x 1/4" Male Pipe Thread  
**(bulk available -73755)**




Model F176152  
1/4" Male Pipe Thread x  
9/16" Left Hand Male Thread  
**(bulk available -76152)**



Model F176154  
9/16" Left Hand Male Pipe Thread x 9/16"  
Left Hand Male Thread  
**(bulk available -76154)**



Model F176140  
1"-20 Male Throwaway Cylinder  
Thread x 1/4" Female Pipe Thread  
**(bulk available -76140)**




Model F176262  
1"-20 Female Throwaway Cylinder  
Thread x 1/4" Male Pipe Thread  
**(bulk available -73754)**



Model F176140  
Female P.O.L. w/Acme Thread  
x 1/4" Male Pipe Thread  
**(bulk available -73791)**




Model F173729  
1/4" Male Pipe Thread x 1/4"  
Inverted Female Flare  
**(bulk available -73729)**



Model F176153  
3/8" Male Pipe Thread x 9/16"  
Left Hand Male Thread  
**(bulk available -76153)**



Model F176262  
3/8" Male Pipe Thread x 3/8"  
Male Flare  
**(bulk available -76262)**



Model F176153  
3/8" Male Pipe Thread x 9/16"  
Left Hand Male Thread  
**(bulk available -76153)**



Model F176262  
3/8" Male Pipe Thread x 3/8"  
Male Flare  
**(bulk available -76262)**




Model F173752  
Propane Stay A While Tee

Excess Flow Soft Nose P.O.L. x 1"-20 Male Throwaway Cylinder Thread x Female P.O.L. w/Acme Thread x 1/4" Inverted Female Flare. Connects cylinder to additional appliance.



Model F173753  
Propane 90° Stay Flow Adapter

Excess Flow Soft Nose P.O.L. x 1"-20 Male Throwaway Cylinder Thread x Female P.O.L. and Acme Thread. Connects additional appliance to 20lb. propane tank.

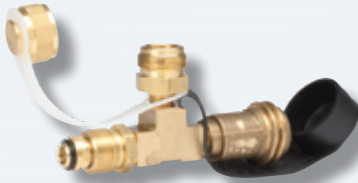

Model F173751  
Propane Adapter Tee

Excess Flow Soft Nose P.O.L. x 1"-20 Throwaway Cylinder Thread x Female P.O.L. w/Acme Thread  
**Use with hose assy. F173711 and F173702.**



Model F173760  
Propane 90° Elbow

Restricted Flow Soft Nose P.O.L. x 1"-20 Male Throwaway Cylinder Thread. Allows appliances designed for to be attached directly to refill cylinder such as a lantern.



Model F171735  
Propane "Y" Female Adapter with Handwheel

Two Female P.O.L.'s w/Acme Threads & Excess Flow Soft Nose P.O.L. Hook up 2 appliances to a bulk cylinder use with F173701-02.



Model F171715  
Propane "Y" Male Adapter with Handwheel

Propane 2-1"-20 Throwaway Cylinder Threads x Excess Flow Soft Nose P.O.L. Hookup two appliances to a refillable 20lb. cylinder use with F173710-11 hose assembly



Model F176400  
Propane Brass Caps

Propane 1" - 20 Female Pipe Thread. Provides threaded protection for most posts, tees, etc. Two caps provided.



Model F176171  
Propane "Steak Saver" Adapter

Propane 1" - 20 Female Throwaway Cylinder Thread x Female P.O.L. & Acme Thread. Used with 1lb. bottles to grills or distribution posts to grills.



Model F173737  
Propane 2 Tank Hook Up Kit

Propane 30" Hose Assembly with Excess Flow Soft Nose P.O.L.'s on both ends x Full Flow Tee. Most commonly used to hook multiple bulk tanks to applications.



Model F173169  
TankFoot® Tank Stabilizer (6 pack only)

Fits 20lb., 30lb. and 40lb. cylinders; reduces risk of tipping cylinder while on jobsite and transporting in your R.V., pick-up, car, etc.






Model F171806

12' Quick Connect Propane Hose Assembly with shut off valve and full flow male plug

Connects a low pressure propane gas grill to an onboard RV propane supply. For use with F176181 Low pressure quick connect kit.



Model F176181

Full Flow Male Plug & Propane/Natural Gas Connector Kit w/ Shut-off valve

1/4" Male Pipe Thread x 1/4" Female Pipe Thread  
CSA certified; UL approved, Low pressure



Model F171117

Propane 12' Hose

12' R.V. Quick-connect connection x 1" 20. For use with F176181 Low Pressure quick connect kit.



Model F176187

Full Flow Male Plug & Propane/Natural Gas Connector Kit w/ Shut-off valve

3/8" Male Pipe Thread x 3/8" Female Pipe Thread  
CSA certified, UL approved



Model F176281

Propane or Natural Gas Full flow Male Plug

1/4" Male Pipe Thread x Full Flow Male Plug - For high pressure appliances. Can be used with F176334 or can replace excess flow plug-in F176186 & F176330



Model F176190

Full Flow Male Plug & Propane/Natural Gas Connector

1/4" Female Pipe Thread x Quick Connect x 1/4" Male Pipe Thread  
CSA certified, UL approved, Low Pressure



Model F171716

Propane Double Quick Connect

Propane 2 1/4" Female Quick Connects x 1/4" Male Quick Connect. Hookup 2 low pressure propane appliances to an RV.



Model F171718

Propane Tank Quick Connect

Propane 1/4" Female Quick Connects x Appliance ACME Nut. 11" WC regulator. 90°, 75,000 BTU max flow.





## MAINTAINING HIGH QUALITY GAS PRODUCTS HOME AND AWAY



There is a distinct difference between UL Listed Hose Assemblies and UL Approved Hose. A product manufactured and marketed as featuring UL Approved Hose indicates the propane hose itself meets the hose certification only and has no relation to the fittings on each end, nor the method for assembling the system together. A product manufactured and marketed as featuring a UL Listed Assembly indicates that the entire hose system, including the hose and fittings, is certified and tested together as an assembly and meets all UL requirements for the entire system. Enerco's RV pigtails and most of the commonly used LP Hoses are certified as UL Listed Assemblies giving our customers the peace of mind that not only the hose has been certified but that entire system is certified. Enerco's UL Listed hoses are 100% tested (UL569 and UL21 up to 700 psi) and are clearly marked with the UL symbol as well as serialized for safety records.

UL569 Certification covers hoses from 0-5'

UL21 Certification covers hoses from 5.1' and up

Enerco, based in Cleveland Ohio, has been for years at the forefront of infrared combustion technology. This market leading technology has allowed Enerco to build expertise in gas products as well as heavy duty commercial and construction heating products. Enerco delivers innovative technology with unmatched quality and service. Many of our items are UL Assembled or made with UL components Ensuring safety and uniformity.